

Position	Count	Description
----------	-------	-------------

1	UPS 32-100 180
---	----------------



Product photo could vary from the actual product

Product No.: On request

The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing.

The bearings are lubricated by the pumped liquid.

The pump has 3-step speed selector.

The pump is characterized by:

- * Stainless steel shaft.
- * Ceramic radial bearing system.
- * Carbon axial bearing.
- * Stainless steel rotor can and bearing plate.
- * Corrosion-resistant impeller, Composite, PES/PP.
- * Cast iron pump housing.

The motor is a 1-phase motor.

No additional motor protection is required.

Liquid:

Pumped liquid: Water
 Liquid temperature range: 248 .. 383 K
 Q_OpFluidTemp: 333 K
 Density: 983.2 kg/m³

Technical:

TF class: 110
 Approvals on nameplate: CE

Materials:

Pump housing: Cast iron
 EN-JL1030
 ASTM 30 B
 Impeller: Composite, PES/PP

Installation:

Ambient max at 176°F liquid: 313 K
 Maximum operating pressure: 1000 kPa
 Pipe connection: G 2
 Pressure stage: PN 10
 Port-to-port length: 180 mm

Electrical data:



C run: 9.5 μF
 Power input in speed 1: 280 W
 Power input in speed 2: 340 W
 Max. power input: 345 W
 Main frequency: 50 Hz
 Rated voltage: 1 x 230 V
 Current in speed 1: 1.3 A
 Current in speed 2: 1.5 A
 Current in speed 3: 1.52 A
 Capacitor size - run: 9.5 μF



Company name: Forat Aqua Structures Company (FAS.co)
Created by: Tooraj Sadeghi Zahed
Phone: +98 (021) 33993558
Email: tooraj.zahed@yahoo.com
Date: 5/10/2017

Position	Count	Description
		Enclosure class (IEC 34-5): X4D Insulation class (IEC 85): H Others: Net weight: 6.4 kg Gross weight: 6.9 kg Shipping volume: 0.012 m ³

On request UPS 32-100 180 50 Hz

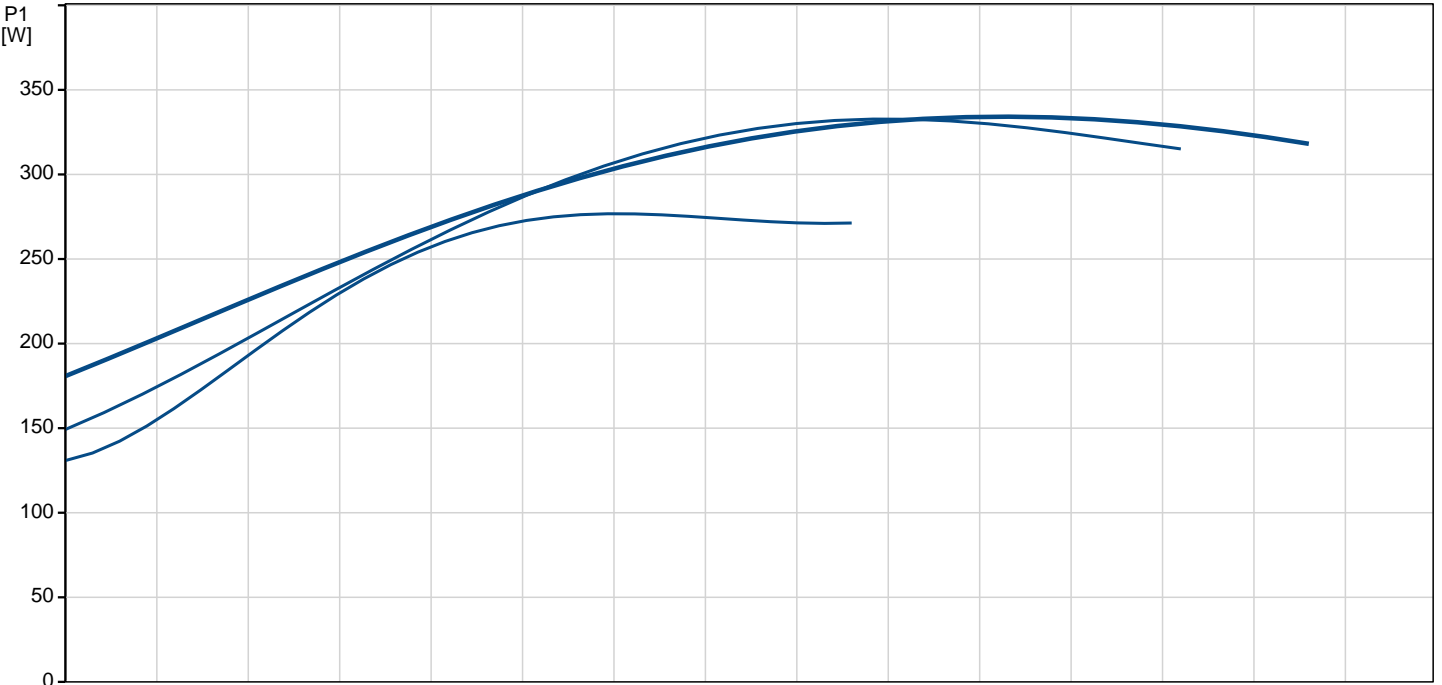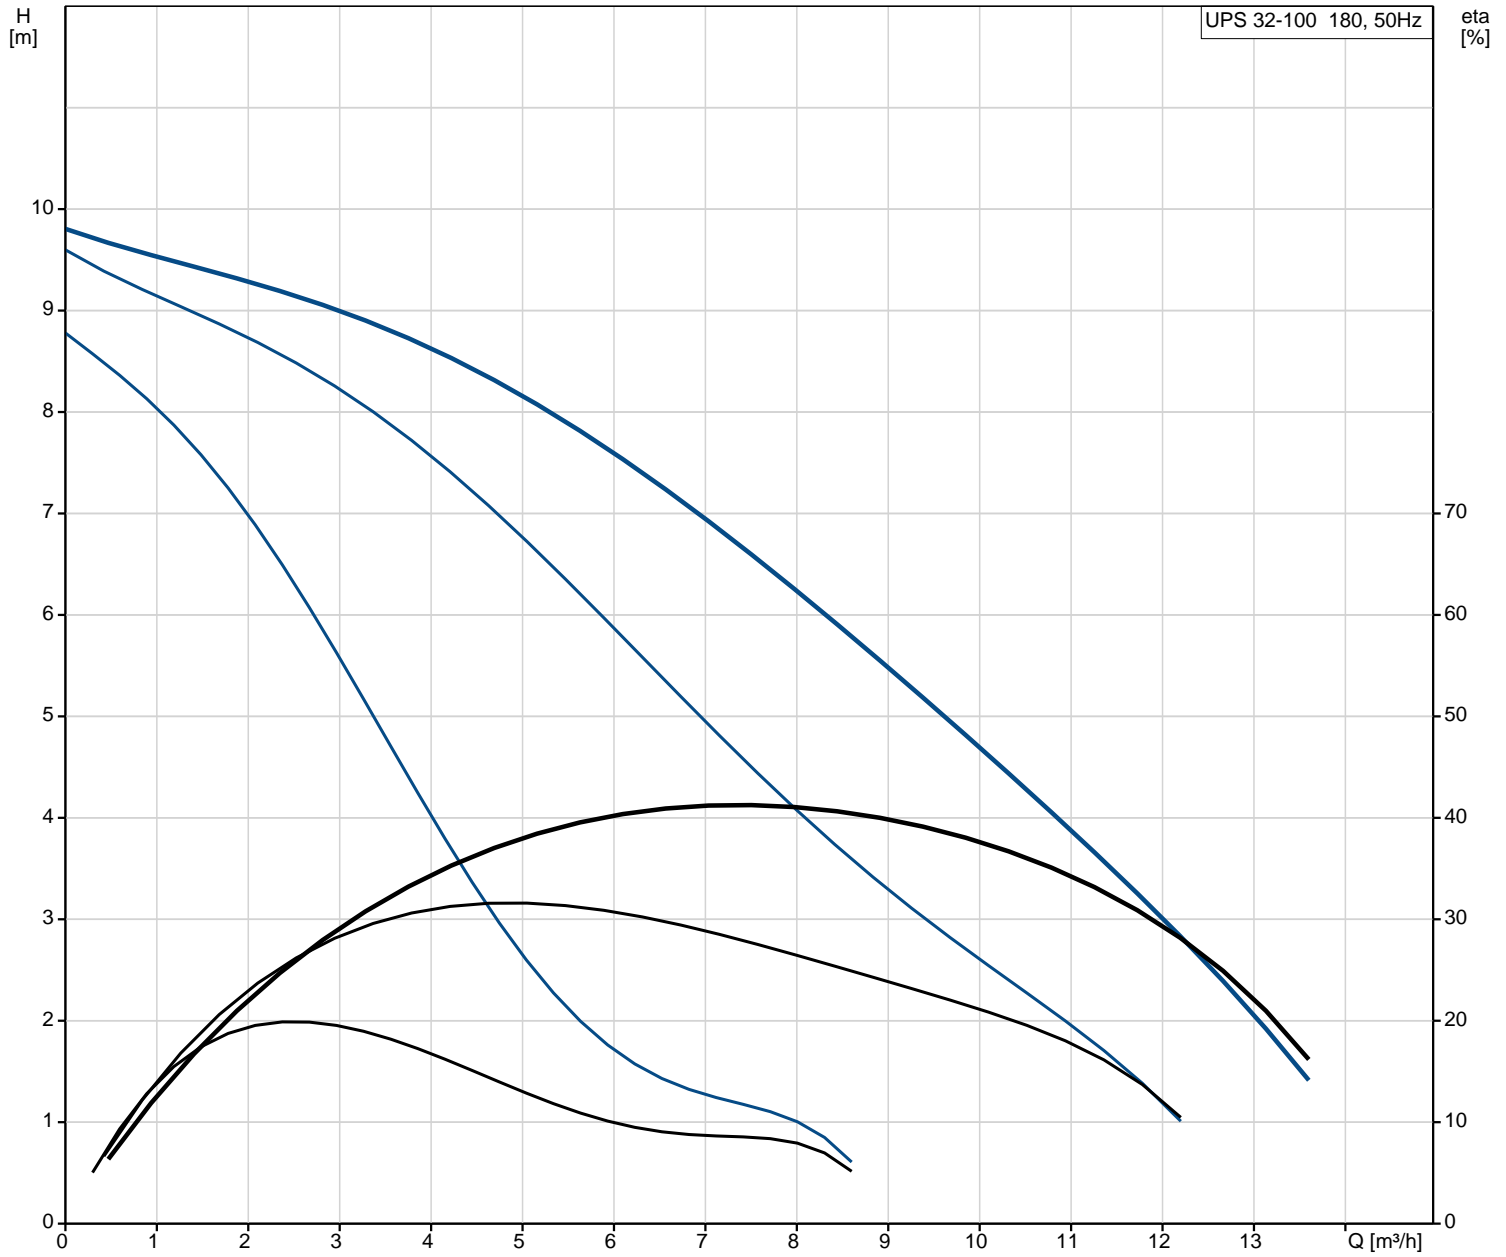

Description	Value
General information:	
Product name:	UPS 32-100 180
Product No.:	On request
EAN:	On request
Price:	On request
Technical:	
Speed Number:	3
Head max:	10 m
TF class:	110
Approvals on nameplate:	CE
Materials:	
Pump housing:	Cast iron EN-JL1030 ASTM 30 B
Impeller:	Composite, PES/PP
Installation:	
Ambient max at 176°F liquid:	313 K
Maximum operating pressure:	1000 kPa
Pipe connection:	G 2
Pressure stage:	PN 10
Port-to-port length:	180 mm
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	248 .. 383 K
Q _{OpFluidTemp} :	333 K
Density:	983.2 kg/m ³
Electrical data:	
C run:	9.5 µF
Power input in speed 1:	280 W
Power input in speed 2:	340 W
Max. power input:	345 W
Main frequency:	50 Hz
Rated voltage:	1 x 230 V
Current in speed 1:	1.3 A
Current in speed 2:	1.5 A
Current in speed 3:	1.52 A
Capacitor size - run:	9.5 µF
Enclosure class (IEC 34-5):	X4D
Insulation class (IEC 85):	H
Motor protection:	CONTACT
Thermal protec:	internal
Controls:	
Pos term box:	9H
Others:	
Net weight:	6.4 kg
Gross weight:	6.9 kg
Shipping volume:	0.012 m ³

